PROJECT EXPERIENCE : GUYANA

SUNMASTER

SunMaster Solar Street Lights Illuminate Guyana's Streets: President Lavishes Praise on Contributions



Location
Guyana

Project Time
January to August 2024

Project Quantity
885units

Products Used
Solar Panel:450W36V;
LED Lamp: 110W;
Battery:24V72AH;
Controller: MPPT 15A
Lamp Pole:9m....



Introduction

In recent years, the picturesque streets of Guyana have witnessed a remarkable transformation, with the installation of SunMaster solar street lights. These energy-efficient lighting solutions have not only brightened up the nation's thoroughfares but have also garnered immense praise from the President for their invaluable contributions to Guyana's sustainable development goals. Let's delve into the significance of SunMaster's solar street lights and the commendations they have received.

Illuminating the Streets of Guyana

Guyana, known for its lush rainforests and rich biodiversity, has been taking significant strides towards sustainable development. As part of this endeavor, the government has been actively seeking innovative solutions to reduce energy consumption and cut down on greenhouse gas emissions. SunMaster, a renowned solar lighting company, has played a pivotal role in achieving these goals by installing solar street lights across the nation.

SunMaster's solar street lights utilize cutting-edge technology, harnessing the power of the sun to generate

electricity. These lights are equipped with high-quality solar panels that efficiently convert sunlight into energy, which is stored in batteries to illuminate the streets after sunset. By utilizing renewable energy sources, Guyana has significantly reduced its dependence on traditional energy grids, thereby mitigating environmental impact and promoting sustainable development.


The President's Praise

Recognizing the immense contributions of SunMaster's solar street lights, the President of Guyana has lavished praise on the company for its role in transforming the nation's streets. In a recent address, the President commended SunMaster for their commitment to sustainable development and their efforts in providing energy-efficient lighting solutions.

The President highlighted how SunMaster's solar street lights have not only enhanced the safety and security of citizens but have also contributed to the beautification of Guyana's urban landscapes. The President emphasized that the installation of solar street lights has played a crucial role in reducing crime rates, as well-lit streets act as a deterrent to criminal activities.

Moreover, the President acknowledged the economic benefits of SunMaster's solar street lights. By utilizing renewable energy, Guyana has been able to reduce its energy costs significantly. The funds saved can be redirected towards other developmental projects, such as improving infrastructure, healthcare, and education.



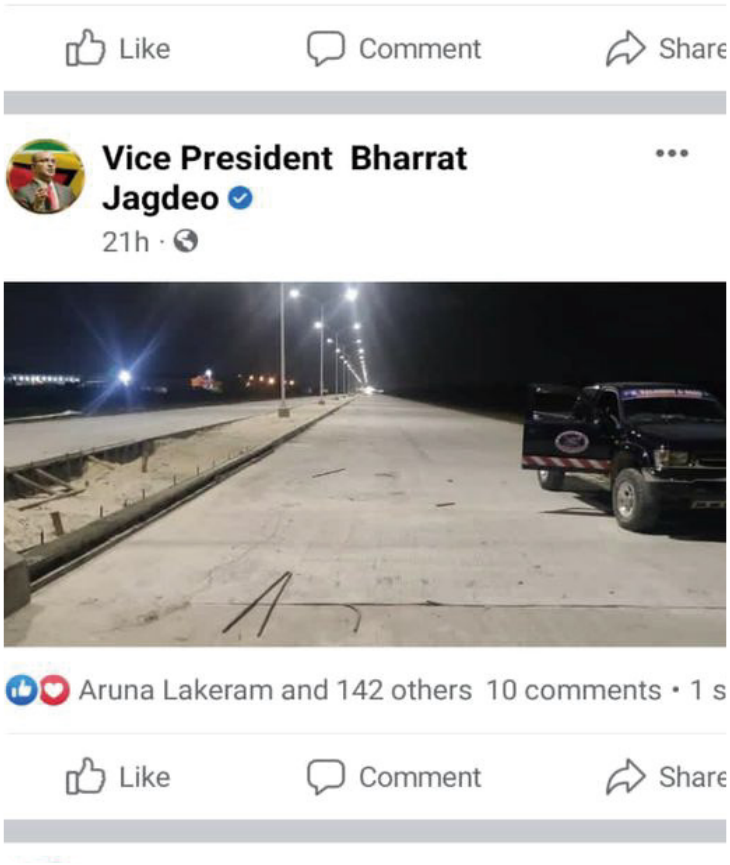





Conclusion

SunMaster's solar street lights have truly illuminated the streets of Guyana, both literally and metaphorically. Through their commitment to sustainable development and the provision of energy-efficient lighting solutions, SunMaster has received well-deserved praise from the President of Guyana. The installation of solar street lights not only enhances safety and security but also contributes to the nation's economic growth and environmental sustainability. Guyana's successful implementation of renewable energy solutions serves as a shining example for other nations striving to build a brighter, greener future.



Installation Photo







SUNMASTER
Solar Light Manufacturer

Jinhua SunMaster Solar Co., Ltd
No. 2819 Haitang East Road – Jinhua City - Zhejiang – China
Mobile: +86-13967961680 info@chinasunmaster.com

Sales Contract

Buyer:
[redacted]

No.: 24ZYB13-NBS

Date: Jan. 07, 2024

Photo (only for reference)	Description & Specification	Q'ty (sets)	Unit Price	Amount
	**Double Arms Solar Street Light with Guyana Flag** 1.Lamp: 110W, Bridgelux LED,180lm/w, 4500k,>100,000 hrs fixed into decoration arm, 2modules, IP66 Q'ty: 2pcs 2.Solar panel: Mono 450W, A grade solar cell Q'ty:2pcs 3.Lithium battery: 72Ah/25.6V, Iron phosphate (LiFeP04) sealed by aluminum case fixed under solar panel Q'ty:2pcs 4.Solar controller: 15A, 24V auto-sensing, light on +time intelligent control,high efficient and accurate charging control,IP68,various protections Q'ty:2pcs 5. Cable: solar powered lighting connection, Q'ty:2sets 6. Pole: 9m height,diameter 120mm/214mm, 4.5mm thick; Base flange 330x330x20mm, Q235 steel,high wind resistance,anti-rust, shine white color hot-dip galvanized and spray plastic powder coated,with fixing bracket and, stainless steel decoration double lamp arms, cylinder wrapped with Guyana flag reflector on top and reflector on bottom, life-span 20years, without foundation kit Q'ty:1set	631	[redacted]	
	**Single Arm Solar Street Light with Guyana Flag** 1.Lamp: 110W, Bridgelux LED,180lm/w, 4500k,>100,000 hrs fixed into decoration arm, 2modules, IP66 Q'ty: 1pcs 2.Solar panel: Mono 450W, A grade solar cell Q'ty:1pcs 3.Lithium battery: 72Ah/25.6V, Iron phosphate (LiFeP04) sealed by aluminum case fixed under solar panel Q'ty:1pcs 4.Solar controller: 15A, 24V auto-sensing, light on +time intelligent control,high efficient and accurate charging control,IP68,various protections Q'ty:1pcs 5. Cable: solar powered lighting connection, Q'ty:1sets 6. Pole: 9m height,diameter 120mm/214mm, 4.5mm thick; Base flange 330x330x20mm, Q235 steel,high wind resistance,anti-rust, shine white color hot-dip galvanized and spray plastic powder coated,with fixing bracket and, stainless steel decoration 8ft single arms, cylinder wrapped with Guyana flag reflector on top and reflector on bottom, life-span 20years, without foundation kit Q'ty:1set	254	[redacted]	

TOTAL: 2,920,770.00

SUNMASTER
Solar Light Manufacturer

Jinhua SunMaster Solar Co., Ltd
No. 2819 Haitang East Road – Jinhua City - Zhejiang – China
Mobile: +86-13967961680 info@chinasunmaster.com

Sales Contract

To:
Ministry of Housing and Water, Central Housing and Planning Authority, Guyana

No.: 24ZYB13-NBS

Date: Jan. 07, 2024

---

(1). Loading Port: Ningbo or Shanghai


(2). Time of Shipment: 30-45days after received the deposit payment. Shipment arranged by Seller.

(3). Terms of Payment: 40% deposit(USD1,168,308) for starting production; second payment 30% (USD876,231) paid before delivery; third payment 25%(USD730,192.5) paid after installation completed within 10 working days; final 5% (USD146,038.5) paid upon warranty time within 10 working days.

If the buyer fails to make second payment within 60 days, the seller has the right to seek payment for the goods through legal means or dispose of the goods without returning the deposit. In such cases, the seller shall be considered to have automatically obtained the brand authorization.

(4). Warranty: 5years since date of BL.

(5). Bank information:
Beneficiary Bank: CITIBANK N.A. New York Branch
SWIFT Code: CITIUS33 or CITIUS33XXX
Beneficiary Bank Address: 111 Wall Street New York, New York 10043, United States
Beneficiary Name: JINHUA SUNMASTER SOLAR CO., LTD
Account Number: 7099 0000 0002 1654 2
Beneficiary Address: No.2819, Haitang East Road, Jinhua City, Zhejiang Province , China

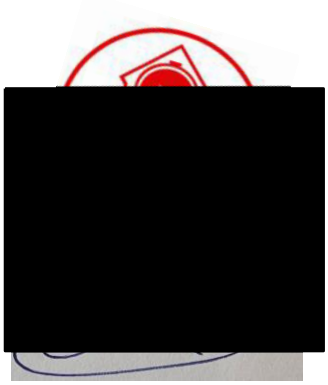The Buyer's Stamp: 

The Seller's Stamp: 金华市尚特太阳能科技有限公司 JinHua Sunmaster Solar Co.,Ltd

BOQ of 631units 110W Solar Street Light (Double Arms) &254units 110W Solar Street Light (Single Arm) Guyana Governmental Project

Project: Supply of 110W Solar Street Light for the Schoonord to Crane Four Lane Highway and the Diamond to Craig Four Lane Highway

Client: [redacted]

Contractor: [redacted]

Material Supplier: Jinhua SunMaster Solar Co., Ltd (China)

Item No.	Description	Quantity	Rate (USD)	Total Cost (USD)
110W Solar Street Light (Double Arms)				
1	110W LED Light, x2pcs	631	[redacted]	
2	450W Solar Panel, x2pcs			
3	72Ah25.6V Lithium Battery, x2pcs			
4	MPPT 15A Solar Controller, x2pcs			
5	9M Decoration Pole with Guyana Flag With Double Arms			
110W Solar Street Light (Single Arm)				
1	110W LED Light, x1pcs	254	[redacted]	
2	450W Solar Panel, x1pcs			
3	72Ah25.6V Lithium Battery, x1pcs			
4	MPPT 15A Solar Controller, x1pcs			
5	9M Decoration Pole with Guyana Flag Wit Single Arm		Total:	**2,920,770.00**
Say: US Dollars Two Million Nine Hundred and Twenty Thousand Seven Hundred and Seventy Only.				

Steven

Chief Engineer

Jinhua SunMaster Solar Co.,Ltd

July 08, 2025

金华市尚特太阳能科技有限公司
JinHua Sunmaster Solar Co.,Ltd